


Series PLT

Dimensions in inch (mm)

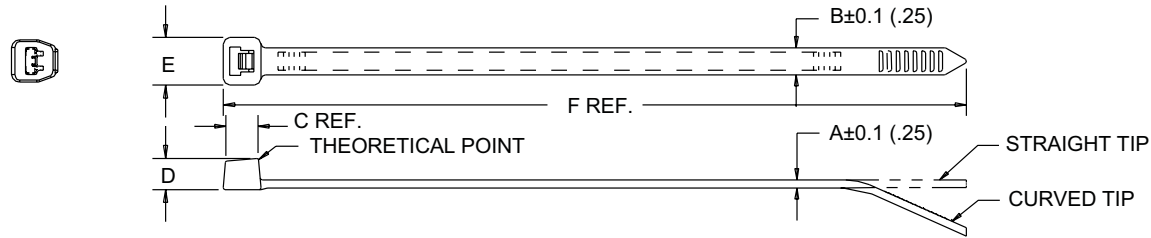

TYPE	BUNDLE DIA. in (mm)		A	B	C	D	E	F	MIN. LOOP TENSILE lbs (N)	TIP STYLE
	MIN	MAX								
PLT.6SM	.01 (.3)	.6 (15)	.030 (.76)	.070 (1.8)	.124 (3.1)	.095 (2.4)	.125 (3.2)	2.8 (71)	8 (36)	CURVED
PLT.7M	.03 (.8)	.68 (17)	.032 (.78)	.090 (2.3)	.148 (3.8)	.115 (2.9)	.180 (4.6)	3.1 (79)	18 (80)	
PLT1M	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)		3.9 (99)		
PLT1.5M		1.25 (32)					5.6 (142)			
PLT2M		2.00 (51)	8.0 (203)							
PLT1.5I	.06 (1.5)	1.38 (35)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	5.6 (142)	40 (178)	
PLT2I		2.00 (151)						8.0 (203)		
PLT2.5I		2.50 (64)	.052 (1.3)	.145 (3.7)	.220 (5.6)	.260 (6.6)	.337 (8.6)	9.7 (246)		
PLT4S		4.00 (102)						14.5 (368)		
PLT5S		5.00 (127)						17.5 (445)		

TYPE	BUNDLE DIA. in (mm)		A	B	C	D	E	F	MIN. LOOP TENSILE lbs (N)	TIP STYLE
	MIN	MAX								
PLT3I	.06 (1.5)	3.00 (76)	.052 (1.3)	.145 (3.7)	.220 (5.6)	.180 (4.6)	.260 (6.6)	11.4 (290)	40 (178)	CURVED
PLT4I		4.00 (102)						7.4 (188)		
PLT2S		1.88 (47.8)						50 (222)		
PLT3S	.188 (4.8)	3.00 (76)	.078 (2.0)	.350 (8.9)	.406 (10.1)	.340 (8.6)	.560 (14.2)	11.5 (292)	175 (778)	STRAIGHT
PLT4H		4.00 (102)						14.5 (368)		
PLT5H		5.00 (127)						17.7 (450)		
PLT6H		6.00 (152)						20.9 (530)		
PLT8H		9.00 (229)						30.6 (779)		
PLT13H	5.50 (140)	13.00 (330)					43.3 (1100)			