
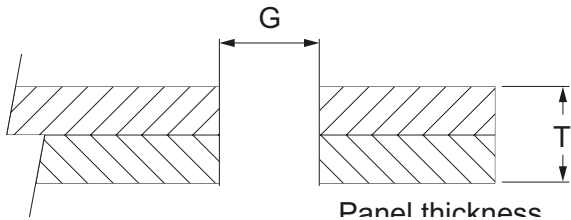
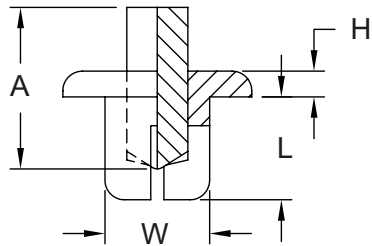


Dimensions in inch (mm)

Series PNKR



Article	HOLE DIA. "G"	THICKNESS "T"	"A"	"H"	"L"	"W"	"D"
PNK R 3045	.122 (3.1)	.08-.12 (2.0-3.0)	.35 (8.9)	.08 (2.0)	.18 (4.6)	.118 (3.0)	.23 (5.8)
PNK R 3055		.12-.16 (3.0-4.0)			.22 (5.6)		
PNK R 4050	.161 (4.1)	.10-.14 (2.5-3.5)	.36 (9.2)	.09 (2.2)	.20 (5.0)	.157 (4.0)	.31 (8.0)
PNK R 4060		.14-.18 (3.5-4.5)			.24 (6.0)		
PNK R 4850	.189 (4.8)	.05-.12 (1.2-3.0)	.41 (10.4)	.13 (3.3)	.20 (5.1)	.189 (4.8)	.39 (9.9)
PNK R 5050		.08-.12 (2.0-3.0)			.37 (9.4)		
PNK R 5060	.201 (5.1)	.12-.16 (3.0-4.0)	.45 (11.4)	.11 (2.8)	.24 (6.1)	.197 (5.0)	.37 (9.4)
PNK R 5070		.16-.20 (4.0-5.0)			.28 (7.1)		
PNK R 5080		.20-.24 (5.0-6.0)			.32 (8.1)		
PNK R 5090		.24-.28 (6.0-7.0)			.35 (8.9)		
PNK R 5100		.28-.31 (7.0-8.0)			.39 (10.0)		
PNK R 6060	.240 (6.1)	.10-.16 (2.5-4.0)	.37 (9.4)	.06 (1.5)	24 (6.1)	.236 (6.0)	.43 (10.9)